


1/2

MANHOLE COVER EVOLUTION 2XKCVAA - 400 KN MONOBLOC FRAME

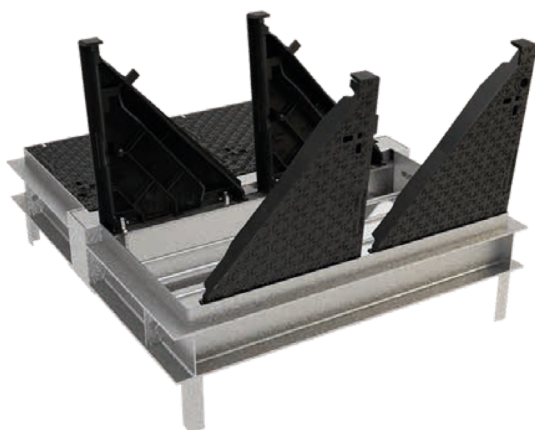

SPECIFICATIONS :


Loading : **400 kN**
Central removable beam
 Locking : ¼ turn lock H Ø22 Stainless Steel

MATERIAL & COATING :

Covers : Spheroidal Cast Iron
 EN-GJS-500-7. Water Based Black Paint
Frame : Steel Hot-Dip Galvanized
Hardware : Stainless Steel / Cast Iron

OPTIONS :

Special lock: burglar-proof SAE
 Fall safety equipment
 Custom Badging & Logo

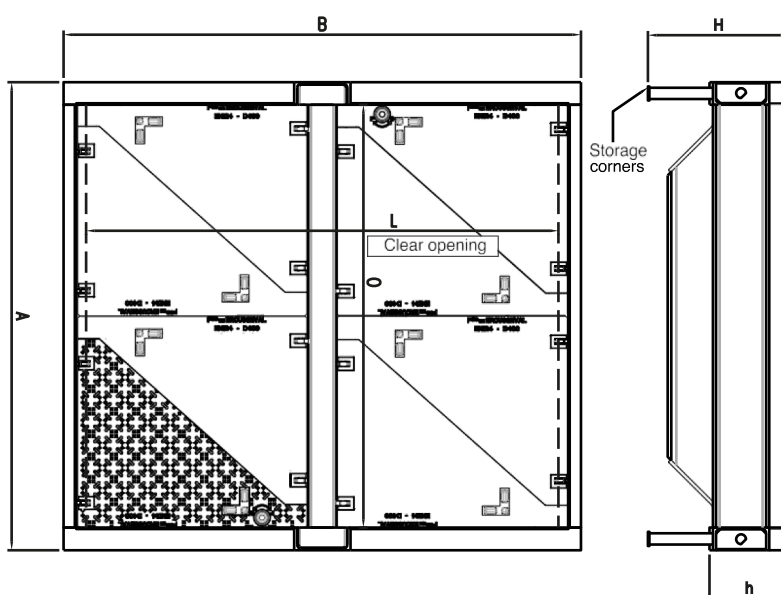

Ref.	Description	Lay-out	Clear opening	A	B	H	h	Weight	
								Beam	Total
			mm					Kg	
28928	2xK2CVAA		1500 x 1674	1660	1834	520	282	126	720
28774	2xK3CVAA		2250 x 1674	2410	1834	520	282	190	980
Weight / Lid (Kg)								49	

MANHOLE COVER EVOLUTION 2XKCVAA - 400 KN MONOBLOC FRAME

REMARKS :

Lift assisted by gas jacks (1 per lid).
Safety blocking to prevent accidental cover closure, activated automatically at the opening of the cover.
Cut off the storage corners before sealing and concrete pouring.

CONCRETE FORMWORK :

Description	Lay-out	O	L
		mm	
2xK2CVAA		1500	1674
2xK3CVAA		2250	1674

